


JFB 翻边自润滑轴承 JFB Flanged Oilless Bushing

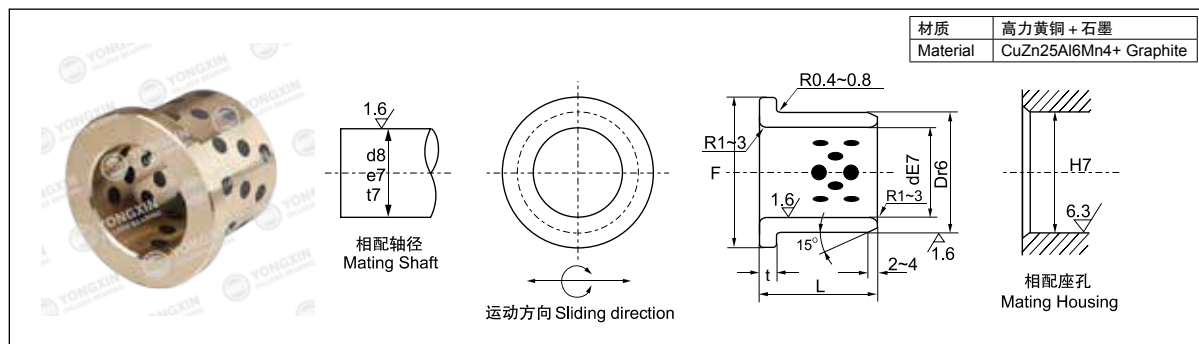

单位unit:mm

d	公差 Tolerance	D	公差 Tolerance	ΦF	t	L																	L ^{0.10} _{0.30}									
						10	12	15	20	25	30	35	40	45	50	55	60	65	70	75	80	90	100	120								
8	+0.040 +0.025	12	+0.034 +0.023	20	2	●	●	●																								
10		14		22	2	●	●	●	●																							
12	+0.050 +0.032	18		25	3	●	●	●	●	●																						
14		20	27	3	●	●	●	●	●	●																						
16		22	29	3	●	●	●	●	●	●																						
18		24	+0.041 +0.028	32	3		●	●	●	●	●	●																				
20		28		35	3			●	●	●	●	●	●																			
20		30		40	5			●	●	●	●	●	●	●																		
25	+0.061 +0.040	35		45	5			●	●	●	●	●	●	●																		
30		40		50	5				●	●	●	●	●	●	●																	
31.5		40		+0.050 +0.034	50	5				●	●	●	●	●	●	●																
35		45	60		5					●	●	●	●	●	●																	
40		+0.075 +0.050	50		65	5					●	●	●	●	●	●																
45	55		+0.060 +0.041		70	5						●	●	●	●	●	●															
50	60				75	5							●	●	●	●	●	●	●													
55		65		80	5							●	●	●	●	●	●	●														
60		75		+0.062 +0.043	90	7.5							●	●	●	●	●	●	●	●												
65		80			95	7.5								●		●	●	●	●	●	●											
70	+0.090 +0.060	85	+0.073 +0.051	105	7.5										●	●	●	●	●	●												
75		90		110	7.5												●	●	●	●	●	●										
80		100			120	10												●	●	●	●	●	●									
90		110	+0.076 +0.054		130	10													●	●	●	●	●									
100		120			150	10															●	●	●	●								
120		140	+0.088 +0.063	170	10															●	●	●	●									
130		150	+0.090 +0.065	180	10																●	●	●									
140		160		190	10																	●	●	●								
150	+0.125 +0.085	170	+0.093 +0.068	200	10																	●	●									
160		180		210	10																		●	●								